


TNC IP66



Black
 Gray

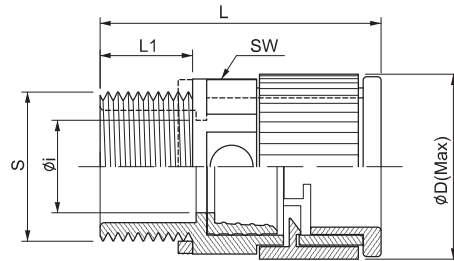

G(PF) M Pg NPT

- Material: High Quality Polyamide6
- Protective: IP 67 (EN 60529)
- Temperature Range: -40°C to + 105°C
- Short Term: up to +150°C
- Self-Extinguishing: UL94-HB
- Color: Free of Halogen Phosphorous and cadmium
Black & Gray
- Application: Machine tool, Shipbuilding, Tramway
Industrial / Automatic Machinery
Printing Machine etc. Joint box with connector
- Certification:

- 재 질 : 고품질 폴리아미드6
- 방 수 등 급 : IP 67 (EN 60529)
- 적용온도범위 : -40°C + 105°C
- 순간최대온도 : up +150°C
- 자기소화성 : UL94-HB
- 색 상 : 검정색, 회색
- 적 용 : 공작기계, 산업기계, 자동화기계
조선소, 전동차등 컨트롤박스에
결합하기 위한 장소에 사용됨.
- 국 제 인 증 :

PF Thread (JIS B0204)

(dimensions in mm)

Order No.									
Black	Gray	Thread PF	For tube size	S	L ₁	L	Ø _i	Ø _D	SW
TNC-G07B	TNC-G07G	G1/4"	07	13.1	11	32.6	8	25	14.2
TNC-G10B	TNC-G10G	G1/2"	10	20.9	13	40	10	25	19.8
TNC-G12B	TNC-G12G	G1/2"	12	20.9	13	40	13	25	22.7
TNC-G16B	TNC-G16G	G1/2"	16	20.9	13	41	14	30	28
TNC-G22B	TNC-G22G	G3/4"	22	26.4	15	49	19	41	37.5
TNC-G28B	TNC-G28G	G1"	28	33.2	15	53	24	47	43
TNC-G36B	TNC-G36G	G1 1/4"	36	41.9	19	65	33	56	52.2
TNC-G42B	TNC-G42G	G1 1/2"	48	47.8	21	72	39	68	64.1
TNC-G48B	TNC-G48G	G2"	48	59.6	21	72	48	68	64.1



Metric Thread (EN60423)

(dimensions in mm)

Order No.									
Black	Gray	Thread PF	Fortube size	S	L ₁	L	Ø _i	Ø _D	SW
TNC-M107B	TNC-M107G	M12 X 1.5	07	12	11	33	8.5	17	14.2
TNC-M127B	TNC-M127G	M16 X 1.5	07	16	11	33	8.5	25	14.2
TNC-M167B	TNC-M167G	M20 X 1.5	07	20	11	33	8.5	25	14.2
TNC-M10B	TNC-M10G	M12 X 1.5	10	12	13	40	7.5	25	19.8
TNC-M120B	TNC-M120G	M16 X 1.5	10	16	13	40	10	25	19.8
TNC-M20B	TNC-M20G	M20 X 1.5	10	20	13	40	10	25	19.8
TNC-M102B	TNC-M102G	M12 X 1.5	12	12	13	40	7.5	25	22.7
TNC-M12B	TNC-M12G	M16 X 1.5	12	16	13	40	11	25	22.7
TNC-M202B	TNC-M202G	M20 X 1.5	12	20	13	40	13	25	22.7
TNC-M126B	TNC-M126G	M16 X 1.5	16	16	13	41	11.5	30	28
TNC-M16B	TNC-M16G	M20 X 1.5	16	20	13	41	14	30	28
TNC-M226B	TNC-M226G	M25 X 1.5	16	25	13	41	14	30	28
TNC-M22B	TNC-M22G	M25 X 1.5	22	25	15	49	18.5	41	37.5
TNC-M3222B	TNC-M3222G	M32 X 1.5	22	32	15	49	20	41	37.5
TNC-M28B	TNC-M28G	M32 X 1.5	28	32	15	53	25	47	43
TNC-M4028B	TNC-M4028G	M40 X 1.5	28	40	15	53	27	47	43
TNC-M36B	TNC-M36G	M40 X 1.5	36	40	19	65	32	56	52.2
TNC-M5036B	TNC-M5036G	M50 X 1.5	36	50	19	65	34	56	52.2
TNC-M48B	TNC-M48G	M50 X 1.5	48	50	21	72	42	68	64.1
TNC-M6348B	TNC-M6348G	M63 X 1.5	48	63	21	72	48	68	64.1

Pg Thread (DIN40430)

TNC-P077B	TNC-P077G	Pg 07	07	12.5	11	33	8	17	14.2
TNC-P097B	TNC-P097G	Pg 09	07	15.2	13	35	8.5	25	14.2
TNC-P117B	TNC-P117G	Pg 11	07	18.6	13	35	8.5	25	14.2
TNC-P137B	TNC-P137G	Pg 13.5	07	20.4	13	35	8.5	25	14.2
TNC-P070B	TNC-P070G	Pg 07	10	12.5	13	40	8	25	19.8
TNC-P09B	TNC-P09G	Pg 09	10	15.2	13	40	10	25	19.8
TNC-P110B	TNC-P110G	Pg 11	10	18.6	13	40	10	25	19.8
TNC-P130B	TNC-P130G	Pg 13.5	10	20.4	13	40	10	25	19.8
TNC-P160B	TNC-P160G	Pg 16	10	22.5	13	40	10	25	19.8
TNC-P0912B	TNC-P0912G	Pg 09	12	15.2	13	40	10	25	22.7
TNC-P11B	TNC-P11G	Pg 11	12	18.6	13	40	12.5	25	22.7
TNC-P132B	TNC-P132G	Pg 13.5	12	20.4	13	40	13	25	22.7
TNC-P162B	TNC-P162G	Pg 16	12	22.5	13	40	13	25	22.7
TNC-P136B	TNC-P136G	Pg13.5	16	20.4	13	41	14	30	28
TNC-P16B	TNC-P16G	Pg 16	16	22.5	13	41	14	30	28
TNC-P216B	TNC-P216G	Pg 21	16	28.3	13	41	14	30	28
TNC-P163B	TNC-P163G	Pg 16	22	22.5	13	49	16	41	37.5
TNC-P21B	TNC-P21G	Pg 21	22	28.3	15	49	19	41	37.5
TNC-P29B	TNC-P29G	Pg 29	28	37	15	53	27	47	43
TNC-P36B	TNC-P36G	Pg 36	36	47	19	65	34	56	52.2
TNC-P48B	TNC-P48G	Pg 48	48	59.3	21	72	49	68	64.1


NPT Thread (ANSI/ASME-B1201)

TNC-N10B	TNC-N10G	NPT 1/2"	10	21.2	13	40	10	25	19.8
TNC-N12B	TNC-N12G	NPT 1/2"	12	21.2	13	40	13	25	22.7
TNC-N16B	TNC-N16G	NPT 1/2"	16	21.2	13	41	14	30	28
TNC-N22B	TNC-N22G	NPT 3/4"	22	26.5	15	49	19	41	37.5
TNC-N28B	TNC-N28G	NPT 1"	28	33.2	15	55	24	47	43

TNC IP67



Black
 Gray



G(PF)

- Material: High Quality Polyamide 6
- Protective: IP 66 (EN 60529)
- Temperature Range: -40° C to + 105° C
- Short Term: up to +150° C
- Self-Extinguishing: UL94-HB
- Color: Free of Halogen Phosphorous and cadmium
Black & Gray
- Application: Machine tool, Shipbuilding, Tramway
Industrial / Automatic Machinery
Printing Machine etc. Joint box with connector

- 재 질 : 고품질 폴리아미드 6
- 방 수 등 급 : IP 66 (EN 60529)
- 적용온도범위 : -40° C + 105° C
- 순간최대온도 : up +150° C
- 자기소화성 : UL94-HB
- 색 상 : 검정색, 회색
- 적 용 : Free of Halogen Phosphorous and cadmium
공작기계, 산업기계, 자동화기계
조선소, 전동차등 컨트롤박스에
결합하기 위한 장소에 사용됨.

PF Thread (JIS B0204)

(dimensions in mm)

Order No.										
Black	Gray	Thread	For tube size	S	L ₁	L	Ø _i	Ø _D	SW	
TNC-G56B	TNC-G56G	G2"	56	59.6	24	64.3	46	93	78	
TNC-G70B	TNC-G70G	G2 1/2"	70	75.1	30	75.2	64	121	94.5	
TNC-G95B	TNC-G95G	G4"	95	113	40	92.2	96	151	118.5	

