

"TR" POLYURETHANE WHEELS WITH CAST IRON CENTRE

-  150-300 mm
-  92 Shore A
-  400-2200 daN
4 km/h
-  320-1700 daN
6 km/h
-  280-550 daN
-  -20 / +80 °C



Description

Tyre: "TR" polyurethane, hardness 92 Shore A, excellent rolling resistance and elasticity features, highly resistant to wear and tear.

Centre: cast iron.

Hub with shielded ball bearings with interference assembly in the seats obtained by machining the centre; also available without bearings.

Uses



Suitable for applications with medium/heavy-duty loads, also with mechanical handling, with speed up to 6 km/h.

The excellent rolling resistance allows a manually handling of heavy loads.

Examples of recommended applications: trolleys for indoor industrial handling, AGV trolleys, containers, electrical pallet trucks, tilt trucks.

Environments of use

Designed for industrial environments, even in presence of alcohols, glycols, hydrocarbons. Not recommended in areas with organic acids and mineral acids, base solutions and saturated vapour.

WEAK ACIDS		WEAK BASES	
STRONG ACIDS		STRONG BASES	
WATER		HYDROCARBONS	
ALCOHOL		SOLVENTS	

For information on the compatibility of the component wheel materials with specific aggressive chemical substances, see table at page 40.



Floors

Suitable for tiles and cement-resin.

Not suitable if large obstacles are present.



Force required to push or tow a wheel

 	100 kg	300 kg	500 kg	700 kg	1000 kg	2000 kg
150x30 mm	1.4	5.7	----	----	----	----
150x35 mm	1.9	5	----	----	----	----
175 mm	1	3.9	11.6	----	----	----
200 mm	< 1	2.2	6	10.4	19	----
250 mm	< 1	2	5.8	8.4	14.8	----
300 mm	< 1	1.7	4.5	7	10	19.3

For each load and diameter, the table indicates the force (in daN) needed to push or tow a single wheel at the constant speed of 4 km/h on smooth flooring. For manual handling of a 4-wheeled trolley we recommend diameters that have values < 5 daN, for frequent handling we recommend diameters with values < 3 daN.

Combination with brackets



Standard-duty brackets NL

Maximum carrying capacity 300 daN - available diameters 150-200 mm
Top plate and bolt hole fittings. Available with front brake.



Medium-duty brackets M

Maximum carrying capacity 500 daN - available diameters 150-200 mm
Top plate fitting. Available with adjustable front brake.



Medium-heavy duty brackets P

Maximum carrying capacity 750 daN - available diameters 150-250 mm
Top plate fitting. Available with front brake and adjustable rear brake.



Heavy-duty PT brackets with hardened ball race grooves

Maximum carrying capacity 900 daN - available diameters 150-200 mm
Top plate fitting. Available with adjustable rear brake.



Extra-heavy duty brackets EP

Maximum carrying capacity 1200 daN - available diameters 150-250 mm
Top plate fitting. Available with adjustable rear brake.


Options available to order:

The series 65GH wheels are also available with assembled thread guards. To order them add the "PF" suffix to the product code. To order loose thread guards see the Accessories section.



mm	mm	kg	COD.	kg	COD.	mm	mm.	mm	mm	daN	daN	daN	daN
150	30	1,45	652104	0,96	654104	17	30	40	12	700	280	400	320
150	35	1,60	652224	1,36	654224	20	35	47	14	825	290	490	390
175	35	2,03	652105	1,79	654105	20	35	47	14	900	350	650	520
200	45	3,51	652106	3,27	654106	20	45	47	14	1125	380	1000	800
200	45	3,42	652206	3,14	654206	25	45	52	15	1125	380	1000	800
250	50	5,50	652208	5,31	654108	20	50	52	15	1750	400	1200	960
250	50	5,59	652108	5,31	654108	25	50	52	15	1750	400	1200	960
300	70	12,31	652109	11,85	654109	30	70	62	16	3000	550	2200	1700

Standard-duty brackets NL - max carrying capacity 300 daN



- 1) Plate: electrolytically galvanised steel sheet
 - 2) Fork: electrolytically galvanised steel sheet
 - 3) Ball race ring: electrolytically galvanised steel sheet
 - 4) Dust seal: orange polyethylene
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	mm	daN
150	30	2.81	656204	2.45	658204	3.10	656524	192	140x110	105x80	11	56	156	300	
150	35	2.96	656214	2.60	658214	3.25	656534	192	140x110	105x80	11	56	156	300	
175	35	3.41	656205	3.12	658205	3.69	656525	217	140x110	105x80	11	56	156	300	
200	45	4.92	656206	4.70	658206	4.70	656526	240	140x110	105x80	11	56	156	300	

Options available to order:




Directional lock for brackets d. 150-200 mm



Footguard for brackets NL-M-P-PT


Standard-duty brackets NL - max carrying capacity 300 daN

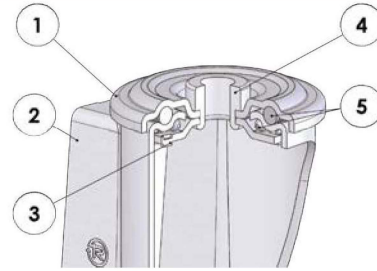

- 1) Plate: electrolytically galvanised steel sheet
 - 2) Fork: electrolytically galvanised steel sheet
 - 3) Ball race ring: electrolytically galvanised steel sheet
 - 4) King pin: bushing in electrolytically galvanised steel
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm	mm	kg	COD.	kg	COD.	mm	mm	mm	mm	mm	daN
150	30	2,68	656424	2,96	656824	188	102	20	56	156	300
150	35	2,83	656434	3,11	656834	188	102	20	56	156	300
175	35	3,29	656425	3,57	656825	212	102	20	56	156	300
200	45	4,77	656426	5,06	656826	236	102	20	56	156	300

Medium-duty brackets M - max carrying capacity 500 daN



- 1) Plate: electrolytically galvanised steel sheet
 - 2) Fork: electrolytically galvanised steel sheet
 - 3) Ball race ring: electroplated galvanised steel
 - 4) Dust seal: blue polyethylene
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: integrated with the plate and cold-rieveted
- Available with adjustable total front foot brake


mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN
150	35	3.31	657214	2.60	658214	3.78	657334	194	140x110	105x80	11	58	178	490
200	45	5.31	657206	4.70	658206	5.25	657326	240	140x110	105x80	11	50	178	500

Options available to order:



Footguard
for brackets NL-
M-P-PT


Medium-heavy duty brackets P - max carrying capacity 750 daN



- 1) Plate: yellow galvanised steel plate
 - 2) Fork: yellow galvanised steel plate
 - 3) Ball race ring: yellow galvanised steel plate
 - 4) Dust seal: orange polyamide
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: steel bolt in grade 8.8 steel and steel nut
- Available with adjustable total rear foot brake

mm		kg		COD.		kg		COD.		mm		mm		mm		mm		daN		daN	
150	30	3,80	657404	2,36	658404	4,08	656624	200	140x110	105x80	11	70	126	400	320						
150	35	3,95	657414	2,51	658414	4,52	656634	200	140x110	105x80	11	70	126	490	390						
175	35	4,42	657405	3,00	658405	4,99	656625	225	140x110	105x80	11	70	126	650	520						
200	45	5,89	657406	4,43	658406	6,46	656626	250	140x110	105x80	11	70	126	750	600						
250	50	8,10	657408	7,00	658408	8,80	656628	298	140x110	105x80	11	66	173	750	600						

Heavy-duty PT brackets with hardened ball race grooves - max carrying capacity 900 daN



- 1) Plate: yellow galvanised steel plate
 - 2) Fork: yellow galvanised steel plate
 - 3) Ball race ring: yellow galvanised steel plate
 - 4) Dust Seal: dark green polyamide
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) Ball race: hardened carbon steel grooves
 - 7) King pin: steel screw, class 8.8 and stainless steel nut
- Available with rear adjustable brake

mm		kg		COD.		kg		COD.		mm		mm		mm		mm		daN		daN	
150	35	3,95	657444	2,51	658414	4,52	658314	200	140x110	105x80	11	70	126	490	390						
175	35	4,42	657435	3,00	658405	4,99	658305	225	140x110	105x80	11	70	126	650	520						
200	45	5,89	657436	4,43	658406	6,20	658306	250	140x110	105x80	11	70	126	900	800						

Options available to order:




Directional lock for brackets d. 150-200 mm



Footguard for brackets NL-M-P-PT

Extra-heavy duty brackets EP - max carrying capacity 1200 daN

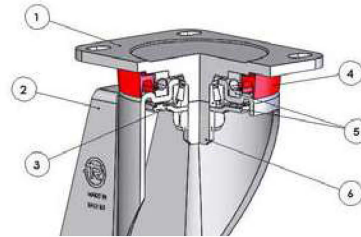

- 1) Plate: white galvanised forged steel
 - 2) Fork: white galvanised forged steel
 - 3) Lower bearing protection ring
 - 4) Dust seal: orange polyethylene
 - 5) Swivel actions: axial ball bearing and tapered roller bearing
 - 6) King pin: integrated with the machine-processed plate
- Available with adjustable total rear foot brake

mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN	daN
150	30	4.06	657804	2.32	658804			200	135x110	105x80	11	70		400	320
150	35	4.21	657814	3.73	658814	4.78	656914	200	135x110	105x80	11	70	126	490	390
175	35	4.66	657805	4.24	658805	5.23	656915	225	135x110	105x80	11	70	126	650	520
200	45	6.14	657806	5.70	658806	6.71	656916	250	135x110	105x80	11	70	126	1000	800
250	50	11.14	657808	9.30	658808			300	175x140	140x105	14	66		1200	960