



ELASTIC RUBBER WHEELS WITH POLYAMIDE 6 CENTRE



Description

Tyre: blue non-marking elastic rubber, hardness 70 Shore A

Centre: in polyamide 6.

Hub with plain bore hole which directly houses the axle.

Hub with ball bearings with interference assembly in the seats obtained by centre moulding.

Uses

Wheels with good elasticity, they are particularly suitable for use on uneven surfaces, in presence of obstacles or for mixed indoor/outdoor uses with medium-duty loads. Examples of recommended applications: trolleys for industrial indoor and outdoor handling, manual transpallet, flight cases for transporting musical instruments.

Environments of use


Designed for industrial environments, even in presence of medium-harsh chemical agents. Not suitable in presence of organic, aromatic solvents, chlorinated substances and hydrocarbons.

WEAK ACIDS		WEAK BASES	
STRONG ACIDS		STRONG BASES	
WATER		HYDROCARBONS	
ALCOHOL		SOLVENTS	



For information on the compatibility of the component wheel materials with specific aggressive chemical substances, see table at page 36.

Floors

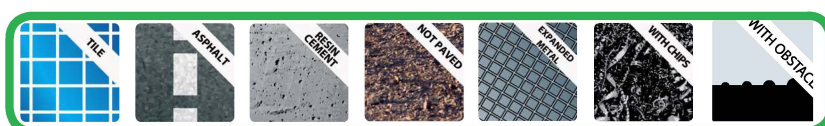They are suitable for use on all types of floors, even in the presence of obstacles. They do not mark or damage fragile floors.



Force required to push or tow a wheel

 	50 kg	100 kg	150 kg	200 kg	300 kg	400 kg
100 mm	2	5	8	----	----	----
125 mm	1.8	3	5	7	----	----
160 mm	1	2	3	6	8.5	----
200 mm	< 1	1.7	2.5	3.8	6.5	----

For each load and diameter, the table indicates the force (in daN) needed to push or tow a single wheel at the constant speed of 4 km/h on smooth flooring. For manual handling of a 4-wheeled trolley we recommend diameters that have values < 5 daN, for frequent handling we recommend diameters with values < 3 daN.

Fittings with brackets



Standard-duty brackets NL

Maximum carrying capacity 300 daN - available diameters 100-200 mm
Top plate fitting. Available with front brake.












Medium-heavy duty brackets P

Maximum carrying capacity 350 daN - available diameters 100-200 mm
Top plate fitting. Available with front brake and adjustable rear brake.












SERIES **73AE**

ELASTIC RUBBER WHEELS
WITH POLYAMIDE 6 CENTRE




																
mm	mm	kg	CODE	mm	mm	daN	daN	daN								
100	36	0.22	731102AE	12	44	200	100	150								
125	36	0.33	731103AE	12	44	270	150	200								
160	48	0.76	731104AE	20	59	350	175	300								
200	48	1.06	731106AE	20	59	510	235	350								



																
mm	mm	kg	CODE	mm	mm	mm	mm	daN	daN	daN						
100	36	0.32	732102AE	12	40	32	10	200	100	150						
125	36	0.41	732103AE	12	40	32	10	270	150	200						
160	48	0.98	732104AE	20	55	47	14	350	175	300						
200	48	1.28	732106AE	20	55	47	14	510	235	350						


Standard-duty brackets NL - max carrying capacity 300 daN



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Dust seal: orange polyethylene
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake


Top view		Side view		Front view		Rear view		Top view		Side view		Front view		Rear view		Speed	
mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	mm	mm	daN	4 km/h
100	36	0.76	735002AE	0.56	735102AE	0.88	735202AE	128	100x85	80x60	9	35	120	150			
125	36	1.03	735003AE	0.76	735103AE	1.14	735203AE	156	100x85	80x60	9	37	120	200			
160	48	2.04	735004AE	1.67	735104AE	2.29	735204AE	198	140x110	105x80	11	56	156	300			
200	48	2.46	735006AE	2.00	735106AE	2.71	735206AE	240	140x110	105x80	11	56	156	300			
100	36	0.87	735602AE	0.66	735702AE	0.93	735802AE	128	100x85	80x60	9	35	120	150			
125	36	1.06	735603AE	0.79	735703AE	1.12	735803AE	156	100x85	80x60	9	37	120	200			
160	48	2.26	735604AE	1.88	735704AE	2.50	735804AE	198	140x110	105x80	11	56	156	300			
200	48	2.68	735606AE	2.22	735706AE	2.93	735806AE	240	140x110	105x80	11	56	156	300			

Medium-heavy duty brackets P - max carrying capacity 350 daN

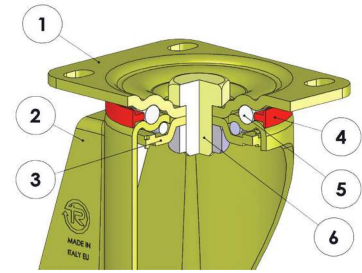

- 1) Plate: galvanised colonial steel plate
 - 2) Fork: galvanised colonial steel plate
 - 3) Ball race ring: galvanised colonial steel plate
 - 4) Dust seal: orange polyamide
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: steel bolt in grade 8.8 steel and steel nut
- Available with total front foot brake

mm		kg		kg		kg		mm		mm		mm		mm		daN
100	36	1.09	736002AE	0.60	736102AE	1.24	736202AE	138	100x85	80x60	9	46	123	150		
125	36	1.29	736003AE	0.77	736103AE	1.28	736203AE	161	100x85	80x60	9	44	123	200		
100	36	1.19	736602AE	0.69	736702AE	1.33	736802AE	138	100x85	80x60	9	46	123	150		
125	36	1.32	736603AE	0.80	736703AE	1.46	736803AE	161	100x85	80x60	9	44	123	200		

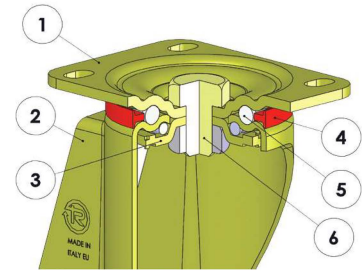

- 1) Plate: galvanised colonial steel plate
 - 2) Fork: galvanised colonial steel plate
 - 3) Ball race ring: galvanised colonial steel plate
 - 4) Dust seal: orange polyamide
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: steel bolt in grade 8.8 steel and steel nut
- Available with adjustable total rear foot brake

mm		kg		kg		kg		mm		mm		mm		mm		daN
160	48	3.11	736004AE	1.72	736104AE	3.68	736204AE	205	140x110	105x80	11	70	126	300		
200	48	3.56	736006AE	2.07	736106AE	4.13	736206AE	250	140x110	105x80	11	70	126	350		
160	48	3.33	736604AE	1.98	736704AE	3.90	736804AE	205	140x110	105x80	11	70	126	300		
200	48	3.78	736606AE	2.29	736706AE	4.35	736806AE	250	140x110	105x80	11	70	126	350		